

ELECTRIC LITHIUM PETROL DIESEL





₩

Snow tank volume 4.1 m³ / compacted 5.1 m³ (145 ft³ / compacted 180 ft³)


}} }

Water tank volume 1,200 l or 1,400 l or 2,000 l (317 gal or 370 gal or 528 gal) + Snow tank-water tank connection 2,550 l or 2,750 l (673 gal or 726 gal)

......

Blade width

2,300 mm (90 1/2 in) or **2,500 mm** (98 1/2 in) Blade change < 60 seconds





HIGH PERFORMANCE FOR LARGE-SCALE OPERATIONS

Powerful drive with diesel, petrol or electric engines together with a large snow and water tank capacity: The WM evo² has been purpose-designed for resurfacing large stadiums and ice rings. Technically sophisticated, with a quick blade-change system and numerous extras, the WM evo² is the perfect partner for professional resurfacing of ice surfaces over 4,200 m² (45,192 ft²).

"Our arena is a training centre for international teams and a venue for major sporting events. Perfect ice quality is an absolute must! With the WM evo², I can guarantee perfect ice rinks."



Toni Doppler Ice expert at the Max Aicher Arena Inzell / Germany





EVERYTHING UNDER CONTROL IN THE DRIVER'S CAB

The WM evo² is a guarantee of outstanding comfort for the driver and boasts a full, unobstructed view whether you're driving cabin-free or with all-round glazing. Three steps provide easy entry to the vehicle. All important information is clearly visible at a glance on the high-definition colour display, and all the main functions are keyboard-controlled. At a simple press of a button the automatic mode begins all work operations in a pre-defined order, while the height-adjustable Grammer suspension seat provides outstanding comfort.












ULTRA-LIGHT BLADES, CHANGED IN 60 SECONDS

The WM evo² quick blade-change system eases working life enormously: Blades can be changed in just 60 seconds! The blades are made in a special steel, giving you both an above-average service life and an impressive weight: They are just 3.5 kilos (6.6 lbs). Blade changes can be carried out quickly and safely. Two blades together with all accessory equipment are supplied as standard in a practical wooden transport box.






- EASY, QUICK AND PRECISE 🗳
 - LOW INJURY RISK 🖪
- IMPROVED QUALITY OF ICE

INTEGRATED EDGER FOR END-TO-END RINK PERFECTION

The edger is fixed to the body of the WM evo², guaranteeing you outstanding stability and performance. It can be operated easily and safely from the driver's seat. The innovative horizontal spring-loaded system with guide wheel ensures that the edger follows the contours of the rink to perfection, and planes the ice evenly, rapidly and cleanly. Edging and subsequent cleaning of the ice surface with the swivel brushes can be carried out in one simple step. The edgers are positioned between the axels and in front of the brush, to ensure an unrestricted overview of the vehicle. When not in use, the edgers are stored between the wheels, and do not affect operation in any way.





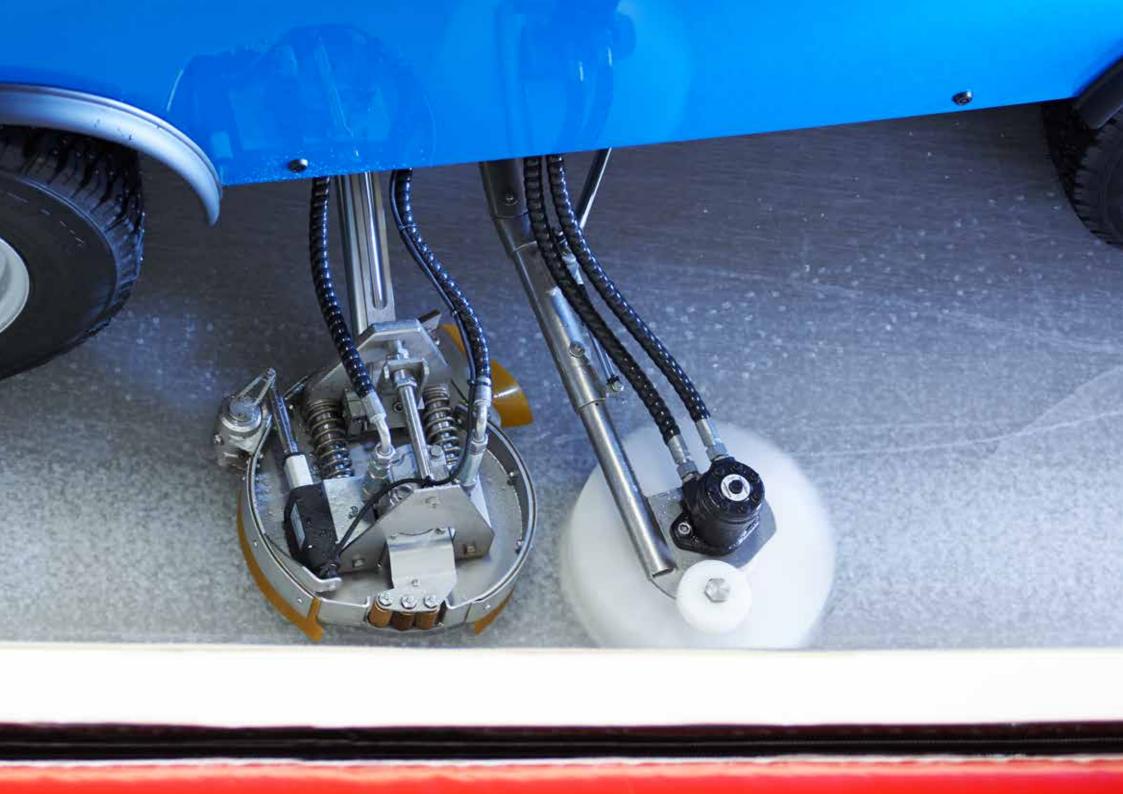


NEED MORE THAN 2,500 LITRES (674 GAL) **OF WATER? NO PROBLEM!**

When you're building up ice depth or using the water sprayer, more water is a must. The WM evo² has it all taken care of! The water and snow tanks can easily be connected into one water tank with a total volume of around 2,550 litres (674 gal) of water. No more standing in cold water and tiresome tugging on hoses: All operations can be carried out from the comfort of the driver's cab – there's more than enough water to do the job.

Example: 1,400-litre (370 gal) water tank & 1,350-litre (356 gal) snow tank = 2,750 litres (726 gal) of water





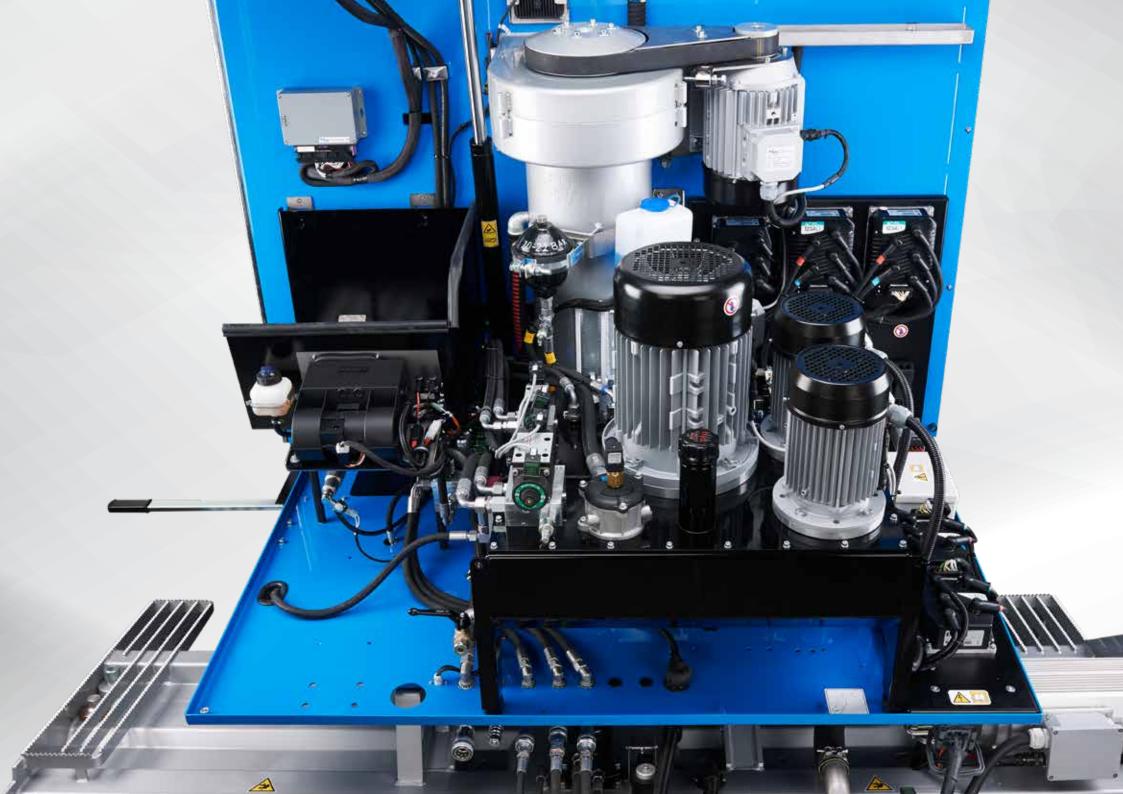

MAINTENANCE



The entire engine technology is easily accessible just by lifting the cab. This means that mechanics can carry out their work quickly and cleanly, which in turn saves on time and service costs. Our team also use remote monitoring to keep an eye on your vehicle monitor and rectify any faults which may occur. COST EFFICIENT FREE AND EASY ACCESS SKILLED REMOTE MAINTENANCE

ELECTRIC / LITHIUM



FACTS & FIGURES

| Motor | 7 asynchronous motors |
|--------------------|---|
| Total power | 33 kW |
| Water tank | 1,200 l (317 gal) |
| | optional 1,400 I (370 gal) or 2,000 I (528 gal) |
| Snow tank | 4.1 m ³ (145 ft ³) - compacted 5.1 m ³ (180 ft ³) |
| Transmission | Continuously adjustable |
| | electric all-wheel drive |
| Hydraulic oil tank | 50 I (13.2 gal) |
| Speed | 0 - 13 km/h (0 - 8 mph) |
| Tyres | 225 / 75 / R16 C |
| | 6 rows of spikes |
| Wheel rims | 8" x 16" |
| | |

INCLUDED IN DELIVERY



2 blades in wooden transport box

safety gloves





Grindstone



2 rubber mats



Storz coupling C with nozzles ø 32, ø 40, ø 50







Fuse set



Key for water filter



1 set hexagonal socket





2 Bodywork keys 7 mm + 8 mm



Operating instructions

screws



Online spare parts catalogue




STANDARD EQUIPMENT

| Cab with heated windshield in safety glass, |
|---|
| windscreen wiper system and interior light |
| PLC control |
| 7 inch colour display |
| USB port for installing updates and data exchange |
| Button for automatic mode: Operations start |
| automatically in a predefined order |
| Spring-suspended and height-adjustable |
| driver's seat (fabric) |
| Armrest with storage capacity |
| Power steering |
| Easily-accessible engine compartment (tiltable) |
| with cab support |
| Maintenance-free asynchronous motors |
| Water tank made of PE |
| Snow bin & water tank connection |
| > 2.550 litres (> 660 gal) |
| Function for automatic water filling system with |
| immobilizer (Acquastop valve as optional) |
| Coated snow tank |

Footbrake and parking brake Hydraulically driven and swivelling side brush Board guide pulley Side mirror, rear Front headlights, snow bin headlight, side headlight Flashing warning light Acoustic signal for reverse drive, snow bin cover operation, reverse of the screw conveyors and blade exchange Proportional water metering System for water dosing in curves Planing system made of stainless steel Constant grinding pressure planing system Quick-Change-System for fast blade replacement (< 60 seconds) 2 blades in wooden transport box (super-light blade - 3.5 kg (6.6 lbs)) 2 towels Scope of delivery-set



In compliance with Suva certification no. E 7139/1.e

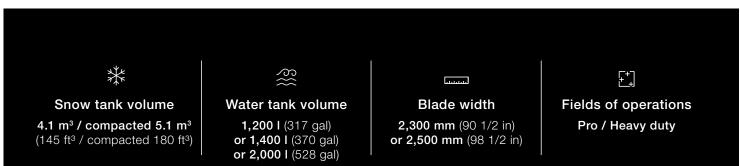

PETROL

FACTS & FIGURES



| Engine | Ford MSG 425 - 2,500 cm ³ (152.5 in ³) |
|--------------------|---|
| Power | 51.5 kW / 70 HP - 2,600 rpm |
| Torque | 190 Nm (140 lb-ft) - 2,600 rpm |
| Unloaded weight | 3,750 kg (8,267 lbs) – basic outfit |
| Water tank | 1,450 l (383 gal) |
| | optional 1,600 I (423 gal) or 2,200 I (581 gal) |
| Snow tank | 4.1 m ³ (145 ft ³) – compacted 5.1 m ³ (180 ft ³) |
| Transmission | Continuously adjustable |
| | hydraulic all-wheel drive |
| Fuel tank | 52 I (13.7 gal) |
| Hydraulic oil tank | 65 I (17.1 gal) |
| Speed | 0 - 16 km/h (0 - 10 mph) |
| Tyres | 225 / 75 / R16 C |
| | 6 rows of spikes |
| Wheel rims | 8" x 16" |
| | |

INCLUDED IN DELIVERY



2 blades in wooden transport box

safety gloves



Grindstone

1

Laceration-proof



2 rubber mats



Storz coupling C with nozzles ø 32 mm, ø 40 mm, ø 50 mm (ø 1 1/4 in, ø 1 1/2 in, ø 2 in)



Adjustment tool



Fuse set



Key for water filter

Operating instructions





1 set hexagonal socket screws



parts catalogue



2 bodywork keys 7 mm + 8 mm




STANDARD EQUIPMENT

| Cab with heated windshield in safety glass, |
|---|
| windscreen wiper system and interior light |
| PLC control |
| 7 inch colour display |
| USB port for installing updates and data exchange |
| Button for automatic mode: Operations start |
| automatically in a predefined order |
| Spring-suspended and height-adjustable driver's |
| seat (fabric) |
| Armrest with storage capacity |
| Power steering |
| Easily-accessible engine compartment (tiltable) |
| with cab support |
| Hydraulic oil cooler |
| Water and fuel tank made of PE |
| Function for automatic water filling system with |
| immobilizer (Acquastop valve as optional) |
| Coated snow tank |
| Snow bin & water tank connection |
| > 2,800 I (> 740 gal) |

| Footbrake and parking brake |
|--|
| Hydraulically driven and swivelling side brush |
| Board guide pulley |
| Side mirror, rear |
| Front headlights, snow bin headlight, side headlight |
| Flashing warning light |
| Acoustic signal for reverse drive, snow bin cover |
| operation, reverse of the screw conveyors and blade |
| exchange |
| Proportional water metering |
| System for water dosing in curves |
| Planing system made of stainless steel |
| Constant grinding pressure planing system |
| Quick-Change-System for fast blade replacement |
| (< 60 seconds) |
| 2 blades in wooden transport box |
| (super-light blade - 3.5 kg (6.6 lbs)) |
| 2 towels |
| Scope of delivery-set |
| |



In compliance with Suva certification no. E 7139/1.e

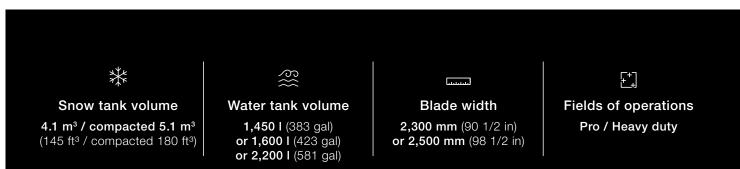

DIESEL

FACTS & FIGURES



| Engine | Hatz 4H50TICD, 4 cylinder 1,952 cm ³ (119 in ³) |
|--------|--|
| Power | 55.4 kW / 74.3 HP - 2,800 rpm |

| Torque | 240 Nm (177 lb-ft) – 1,600 rpm |
|--------------------|---|
| Exhaust gas | DOC, DPF with EGR |
| treatment | Emission Stage V / |
| | EPA Tier 4 final |
| Unloaded weight | 3,750 kg (8,267 lbs) – basic outfit |
| Water tank | 1,450 l (383 gal) |
| | optional 1,600 I (423 gal) or 2,200 I (581 gal) |
| Snow tank | 4.1 m ³ (145 ft ³) – compacted 5.1 m ³ (180 ft ³) |
| Transmission | Continuously adjustable |
| | hydraulic all-wheel drive |
| Fuel tank | 52 I (13.7 gal) |
| Hydraulic oil tank | 65 l (17.1 gal) |
| Speed | 0 - 16 km/h (0 - 10 mph) |
| Tyres | 225 / 75 / R16 C |
| | 6 rows of spikes |
| Wheel rims | 8" x 16" |
| | |

INCLUDED IN DELIVERY



2 blades in wooden transport box



Grindstone

1

Laceration-proof safety gloves





Storz coupling C with nozzles ø 32 mm, ø 40 mm, ø 50 mm (ø 1 1/4 in, ø 1 1/2 in, ø 2 in)



Adjustment tool



Fuse set



Key for water filter

Operating instructions









parts catalogue


STANDARD EQUIPMENT

| Cab with heated windshield in safety glass, |
|---|
| windscreen wiper system and interior light |
| PLC control |
| 7 inch colour display |
| USB port for installing updates and data exchange |
| Button for automatic mode: Operations start |
| automatically in a predefined order |
| Spring-suspended and height-adjustable driver's |
| seat (fabric) |
| Armrest with storage capacity |
| Power steering |
| Easily-accessible engine compartment (tiltable) |
| with cab support |
| Hydraulic oil cooler |
| Water and fuel tank made of PE |
| Function for automatic water filling system with |
| immobilizer (Acquastop valve as optional) |
| Coated snow tank |
| Snow bin & water tank connection |
| > 2,800 I (> 740 gal) |


| Footbrake and parking brake |
|--|
| Hydraulically driven and swivelling side brush |
| Board guide pulley |
| Side mirror, rear |
| Front headlights, snow bin headlight, side headlight |
| Flashing warning light |
| Acoustic signal for reverse drive, snow bin cover |
| operation, reverse of the screw conveyors and blade |
| exchange |
| Proportional water metering |
| System for water dosing in curves |
| Planing system made of stainless steel |
| Constant grinding pressure planing system |
| Quick-Change-System for fast blade replacement |
| (< 60 seconds) |
| 2 blades in wooden transport box |
| (super-light blade - 3.5 kg (6.6 lbs)) |
| 2 towels |
| Scope of delivery-set |
| |



In compliance with Suva certification no. E 7139/1.e

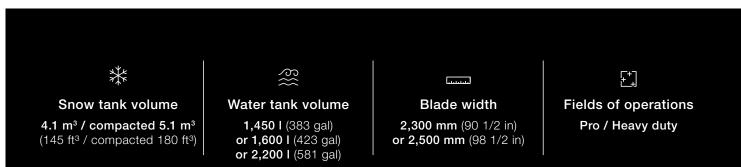

DIMENSIONS

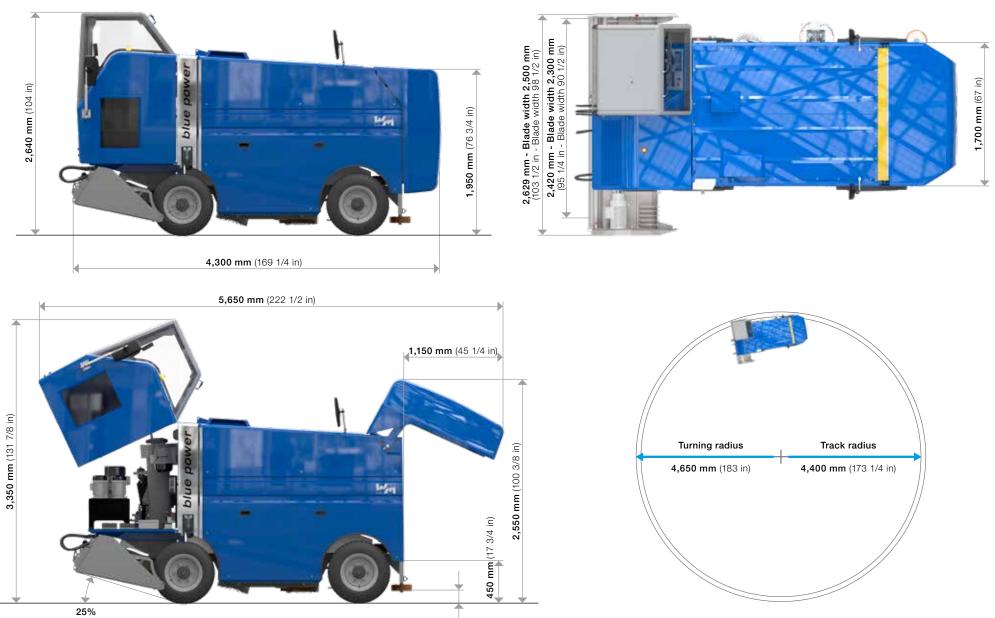

OPTIONALS

Wash system



Ice wash system Multijet

Water application



Screw conveyor wash system vertical



Screw conveyor wash system horizontal



Snow bin wash system



Wheel wash system

co-steering



Towel support standard



Towel lifter

automatic

Side mirror

front left



ICEplus . Water spraying system



ICEplus Flexi Water spraying system with automatic towel lifter




Water sprayer

Dasher board processing Overview & security



Edger made of stainless steel, spring borne with electric height adjustment



Side mirror front right



Heated mirrors



Front camera

OPTIONALS

Comfort



Cab heating



Driver's seat heating Seat pad and backrest



Radio with 2x 10 cm speakers



Acquastop valve



LED headlights



RGB underbody illumination

evo





Painting 1 color RAL



Wrapping


Tail lights

Service



Battery trolley







Spare wheel 16"

Cross-key



Lifting jack with bar 10t (20 000 lbs)





Kit diagnostic cables



Access BMU Battery-Monitoring-Unit

Tool set

Assembly tool for nozzles ICEplus

Attachments for Bavarian Curling



Groove harrow







OUR COMMITMENT

User friendliness

Through the use of top-quality components together with a well-planned design, maintenance work is extremely simple and is reduced to a minimum.





Quality guarantee

The WM evo² is a product which has been developed, built and assembled in house, from start to finish. Only by doing so can we guarantee top quality and punctual delivery times.




Detailed operating instructions

You can find all information on operation, maintenance and safety in the operating manual.

The right replacement part, every time

Order your spare parts easily and conveniently from our online portal: Our series number and digital image system enable you to find the part you need with just one click.



Service and support

Our well-networked, international team of technicians undergo constant training and will be delighted to help you whenever you require assistance.





Series production

All WM technics vehicles are seriesmanufactured. We know exactly which parts have been used in each series run, and can deliver the correct spare parts to you at all times. At the same time, a number of optionals can be retrofitted with minimum effort and maximum precision, even years later.

Quality consciousness

From the manufacture of individual parts right through to the final quality-control inspection: Every step of the process is carried out and monitored with the utmost of precision. Each and every member of our staff is well-trained in his specialist field, and carries out all tasks conscientiously. This is a great advantage for our customers, who can be sure of receiving a technologically sophisticated product which has been manufactured to the very highest of quality standards.





www.wm-on-ice.com Italy

WM ice technics relies on the following distribution partners in North America:



Autoworq Montreal (Québec) Phone 1-866-973-1333 www.autoworq.com



LSK Enterprises Virginia Beach (VA) Phone 1-757-366-0166 www.lskenterprises.com



Outdooricerinks.com Strongsville (OH) Phone 1-440-628-7979 www.outdooricerinks.com

